

# The Best in Portable Drum and Barrel Scales. . . Run-A-Weigh

Cardinal's *Run-A-Weigh* lets you put a platform scale where you need it, when you need it.

Weighing in at less than 100 pounds and featuring built-in handles and wheels, the *Run-A-Weigh* is easy to lift and roll to wherever you need it. Whether it's multiple weighing locations at a single facility or the need to take a scale to special job sites, the *Run-A-Weigh* gives you true portability.



Cardinal

## Choose The Weighing System To Fit Your Requirements

If you need a general purpose scale, a scale for tough environments, or a scale for washdown applications, Cardinal has the right system for you. We offer enclosures in stainless steel or stainless steel NEMA 4X/IP66.

Stainless Steel Run-A-Weigh




With Cardinal's 205 Weight Indicator
For Weighing Applications In Harsh Environments

#### Available in Your Choice of Standard or Stainless Steel



### Cardinal's "Run-A-Weigh" . . . So Portable You Can Use It Anywhere and Everywhere!

Designed for weighing "on-the-move," this portable scale features a Cardinal Digital Weight Indicator that can be mounted on the wall or desk for convenient viewing. Setup is simple and quick with the *Run-A-Weigh's* selfaligning feet. Heavy-duty construction, large checkered safety plate platform with integral ramps, and the 500 lb or 1,000 lb capacity make this the perfect scale for weighing barrels, drums, and small crates - *anywhere!* 

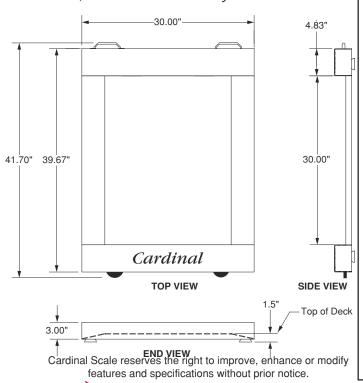

#### **Specifications**

Capacity:

RW-1000 1000 lb x 0.5 lb/450 kg x 0.2 kg RW-500 500 lb x 0.2 lb/225 kg x 0.1 kg

Dimensions: 30"L x 40"W x 4  $\frac{1}{2}$ "H

(76 cm x 102 cm x 11.5 cm)

Platform:  $30"L \times 30"W \times 2^{1/2}"H$ 

(76 cm x 76 cm x 6.4 cm)

checkered safety plate

Construction: Heavy-duty steel with baked-on,

powder paint finish

Shipping Weight: 105 lb

204 Indicator

Display: 5 digit, 7 segment, .1" high LCD

Units Conversion: Keypad selectable

Enclosure: General purpose, stainless steel

Power: Six "C" cell or NiCad batteries, standard 12VDC (115 VAC 60 Hz

adapter) or 115 VAC 60 Hz

Output: RS-232

Zero Tracking: .0 to 4% selectable  $\pm 6$  or 1d selectable

4% max. range

Temperature

Range:  $14 \,^{\circ}\text{F to} + 104 \,^{\circ}\text{F} (-10 \,^{\circ}\text{C to} + 40 \,^{\circ}\text{C})$ 

205 Indicator

Display: 6-digit, 7-segment LED, 14mm/0.6" H

Units Conversion: Lb, lb/oz, oz, kg, g,

Enclosure: NEMA 4X stainless steel Power: 90 to 260 VAC, 50 or 60 Hz

Output: RS-232

Temperature

Range:  $14 \,^{\circ}\text{F to} + 104 \,^{\circ}\text{F} (-10 \,^{\circ}\text{C to} + 40 \,^{\circ}\text{C})$ 

• LED annunciators • Auto shutoff mode

Keyboard setup and calibration

Sold By:



Cardinal Scale Manufacturing Co.